

Root Measuring ALL-IN-ONE Machine YP-300

For Every User




10 Working Mode

Comfortable operation,
the operation process is more frequency
Adjustable speed and torque during operation



Root measurement accuracy 0.5mm
Measurement and expansion adjustment
For Single Apex location function

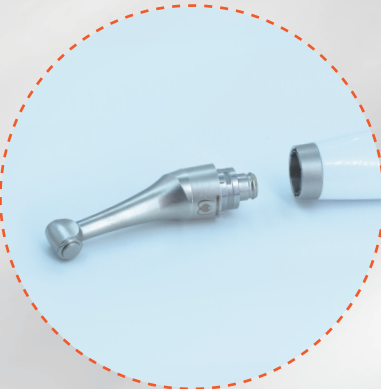

Suitable for LEFT/RIGHT hand operation
All-In-One 16:1 Head



Charging interface: Type-C



Features



All-In-One
16:1 Mini Contra Angle head
16:1 Contra Angle head
All-In-One Body design



Electrical Machinery
Reliable and durable
with stable speed



With Apexlocation
M9 mode is for Single
Apexlocation fuction



Ultra Long Battery1000mAh
large capacity



With Apex location System
Reciprocating motion mode
adjustable angle Measurement and
expansion adjustment



360 degree rotation for 16:1
Contra angle. More convenient for
complicated root canal problems

Parameters

High definition large LED screen

Torque: 0.3-4.0N.cm
Speed: 140-550r/min

Power adapter

Input voltage: 100V-240V 50/60Hz
Output voltage: d.c. 5V, 1A

Program parameter

Working Mode : 10 kinds
Standard head: 16:1
Rotate speed: 140-550 r/min
Torque: 0.3-4.0N.cm

Battery

Battery voltage 3.7Vdc
Battery capacity 800mA
Net weight about 135 g

Transportation and storage environment

Ambient temperature range -40C ~ +55°C
Relative humidity ranges 93%
Atmospheric pressure range 86kPa ~ 106kPa

Operating environment

- a) Environment temperature range : 5 C~40C;
- b) Relative humidity range: ≤80%
- c) Atmospheric pressure range : 86 kPa~106kPa;
- d) power supply: d.c. 3.7V (-10%~+5%)
- e) Avoid using this product in an environment with electromagnetic wave interference (such as near a microwave oven)

